ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

		mstructions for co.	inpleting this	form can be found on t	ne tollowing pa	ges.
COMPANY NAIG NUMBER COMPANY NAIG NUMBER COMPANY NAIG NUMBER The DESCRIPTION (Let and Block Number, etc.)	K. K. March 1985	SECTION A PR	OPERTY INFO	RMATION	7 20	FOR INSURANCE COMPANY USE
### SECTION C BUILDING ELEVATION (INTERNATION Using the Elevation Carifficate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 5 that best describes the sulject building is reference level from the selected diagram is at an elevation of \$\(\text{LIM} \) \(\text{LIM} \) \(\text{V-V} \) \(\text{V-V-V} \) \(\text{V-V-V-V} \) \(\text{V-V-V-V-V} \) \(V-V-V-V-V-V-V-V-V-V-V-V-V-V-V-V-V-V-V-	BUILDING OWNER'S NAME KENNETH S. AND KRISTINA GROSS					POLICY NUMBER
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION	105 South Th	irtieth Ave	Number) OR P.O. F NUE	ROUTE AND BOX NUMBER	-	COMPANY NAIC NUMBER
Longport Section B Flood Insurance Rate Map (FIRM) INFORMATION	Block 59, L					-
Todamunity Number 3. PANEL Number 3. SUFFIX A DATE OF FIRM INDEX A -8 INDEX 10.00 10	*, ·				ersey	08403
3.5 SEFECTOR SET INTO BET INTO	<u> </u>	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): ☐ NGVD '29 ☐ Other (describe on back For Zones A or V, where no BFE is provided on the FIRM for Base Flood Elevations (BFE): ☐ NGVD '29 ☐ Other (describe on back the community's BFE: ☐ Indicate the elevation of the lowest provided on the FIRM and the community has established a BFE for this building site, indicate the community's BFE: ☐ Floor Indicate the diagram number from the diagrams found on Pages 5 and 5 that best describes the subject building's reference level ★ . SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Cartificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 5 that best describes the subject building's reference level ★ . SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Cartificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 5 that best describes the subject building's reference level — ★ . SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Cartificate Instructions, indicate the diagram number from the diagrams is under the selected diagram is at an elevation of ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	Provide the following from t	the proper FIRM (See	Instructions):	*		
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):NGVD '29Other (describe on back For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE:		35 5 7 5				(in AC Zones, use depth)
Using the Eievation Cartificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject: building's reference level \(\frac{\pi}{\pi} \). The top of the reference level floor from the selected diagram is at an elevation of \(\frac{\pi}{\pi} \). \(\frac{\pi}{\pi} \) and A (with BFE). The bordon of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of \(\frac{\pi}{\pi} \). The bordon of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of \(\frac{\pi}{\pi} \). The bordon of the lowest horizontal structural member of the reference level from the selected diagram is \(\frac{\pi}{\pi} \). The floor used as the reference level from the selected diagram is \(\frac{\pi}{\pi} \). If feet above \(\pi \) or below \(\pi \) (check one) the highest grade adjacent to the building. d). FIRM Zone AO. The floor used as the reference level from the selected diagram is \(\frac{\pi}{\pi} \). If feet above \(\pi \) or below \(\pi \) (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? \(\pi \) as \(\pi \) No \(\pi \) Unknown indicate the elevation datum system used in determining the above reference level elevations: \(\frac{\pi}{\pi} \) No \(\pi \) Unknown indicate the elevation datum system used on the FIRM see Section B, Item 7), then-convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2). (NOTE: If the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) Elevation reference mark used appears on FIRM: \(\pi \) Yes \(\pi \) No (See Instruction so n Page 4) The reference level elevation is based on: \(\pi \) actual construction \(\pi \) construction \(\	I. For Zones A or V, where	no BFE is provided or	the FIRM, an	d the community has esta	ablished a BFE fo	Uther (describe on back) or this building site, indicate
describes the subject building's reference level		SECTIO	N C BUILDI	NG ELEVATION INFORM	IATION .	
The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) The elevation of the lowest grade immediately adjacent to the building is:	 (b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fone) the highest grade level) elevated in acco. Indicate the elevation dail under Comments on Pagathe FIRM [see Section In Indicate the Indicate of Indicate In	VE, and V (with BFE). is at an elevation of LBFE). The floor used the highest grade adjusted as the reference adjacent to the building rdance with the commutum system used in detection (NOTE: If the elegible Item 7], then-conventions and the state of t	The bottom o	of the lowest horizontal strain feet NGVD (or other FIR accelevel from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level elements of the selected in measuring the selected in measuring the selected in measuring the selected in th	M datum—see Sed diagram is	ection B, Item 7). J. L feet above or pove or below (check is lowest floor (reference) No Unknown /D '29 Other (describe)
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) The elevation of the lowest grade immediately adjacent to the building is: 1 1 1 9 17 feet NGVD (or other FIRM datum-see Section B, Item 7). SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: 1 1 1 1 1 1 1 1 1 1	. Elevation reference mark	used appears on FIR	M: Yes	No (See Instructions of	n Page 4)	
Section B, Item 7). SECTION D COMMUNITY INFORMATION If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:	(NOTE: Use of construc case this certificate will or	tion drawings is only v nly be valid for the buil	alid if the build	ding does not yet have the	reference level	floor in place, in which tion Elevation Certificate
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:	. The elevation of the lower Section B, Item 7).	est grade immediately	adjacent to the	e building is: 11119	.L7 feet NGVD	(or other FIRM datum-see
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:		SE	CTION D CC	MMUNITY INFORMATION	ON	
	floor" as defined by the o	responsible for verifyings defined in the communication rdinance is:	g building elev unity's floodpla	vations specifies that the ain management ordinand IGVD (or other FIRM date	reference level ince, the elevation	of the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community Issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Allix Seal)
ARTHUR W. PONZIO JR.	28314
TITLE	6QMLVNA NVWE
LAND SURVEYOR	ARTHUR W. PONZIO CO. & ASSO., INC.
ADDRESS 400 NORTH DOVER AVENUE	ATLANTIC CITY NEW JERSEY 08401 ZIP
SIGNATURE	DATE 5/24/94 PHONE 344-8194
Copies should be made of this Certificate for	ry 1) community official, 2) Insurance agent/company, and 3) building owner:
COMMENTS: Grade	e Elevation = 9.73'
Garag	ge Elevation = 10.19'
Lower	r Floor Elevation = 10.39'
First	t Floor Elevation = 13.28'

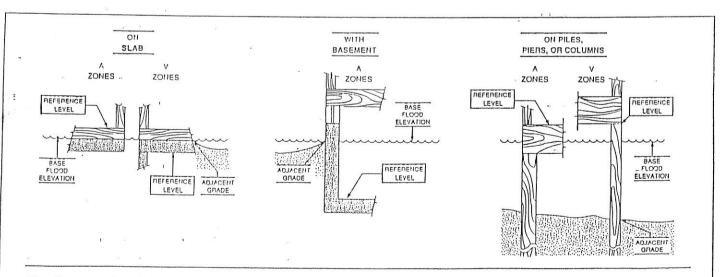

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.